




Newline Products, Inc
2901 Technology Dr, Suite 135
Plano, Texas 75074
Tel: (972)-881-3318
Fax: (972)-881-0985

CONTENDER COLLECTION

TECHNICAL DATA PACKAGE

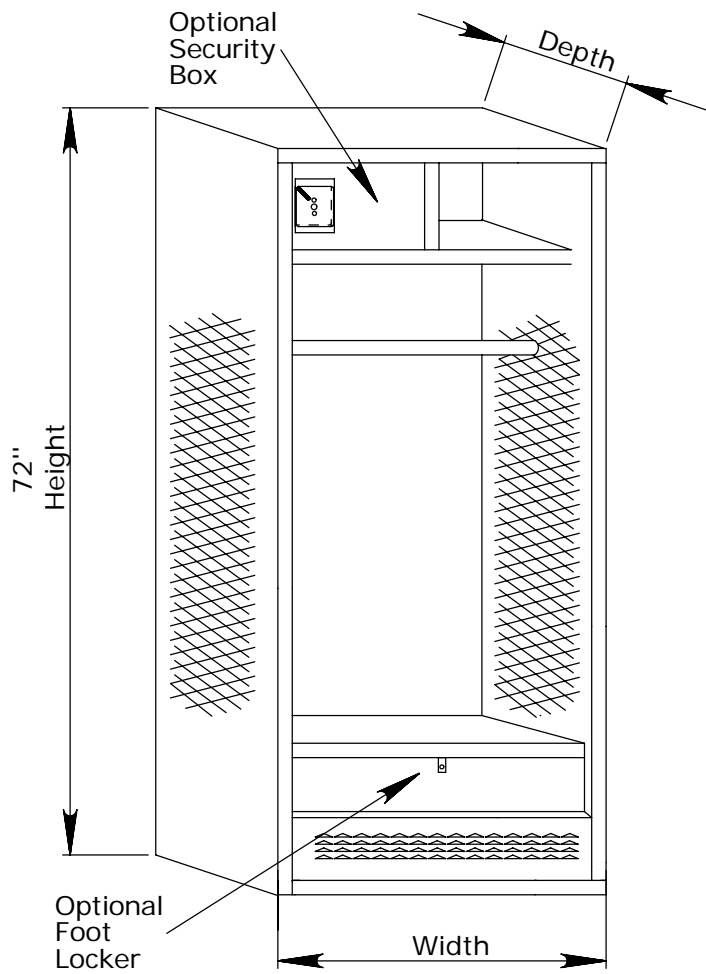



Newline Products, Inc
2901 Technology Dr, Suite 135
Plano, Texas 75074
Tel: (972)-881-3318
Fax: (972)-881-0985

CONTENDER COLLECTION

Locker Specification

SPECIFICATION

Material - All major steel parts shall be of mild cold rolled commercial quality steel.

Finish - All material shall be powder washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

Construction - All lockers shall be built on a unit principle.

Locker Frames - Open front; side shall be diamond perforated.

Body - Top, bottoms, sides and shelves shall be 16 gauge; backs shall be 18 gauge. Bottoms shall have two welded reinforcement channels. Bolt spacing shall not exceed 9" o.c.

Interior Equipment - Lockers shall have two wall hooks and one coat rod.

Number Plates - Each locker shall have a polished aluminum number plate riveted to door face with black numerals 1/2" high.

Color - All parts shall be finished in same color.

Assembly - All locker components shall be assembled with rivets.

Optional - Welded locker is also available, all body parts are welded into a single unit and shipped pre-assembled.

Security Box - 14 gauge lockable door with a 16 gauge side panel. The door shall be attached to a welded frame with a continuous hinge. The hinge shall be mounted to door with aluminum rivets. The door shall have a recessed single point latch handle. Security box door frame members to be not less than 16 gauge formed to a channel shape. Vertical members shall have an additional flange to provide a continuous door strike.

Footlocker - Front footlocker panel shall include a single point latch with padlock strike plate and mini louvers. Footlocker top shall have a continuous hinge. Opening and closing shall be quieted by rubber bumpers mounted to the contact points. Steel shall be strengthened with two reinforcement channels welded to bottom of seat. Two side seat supports shall be fastened to side panels and inserted in a support tab on the front locker panel for added strength.

Installation - Lockers shall be installed in accordance with installation instruction and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.